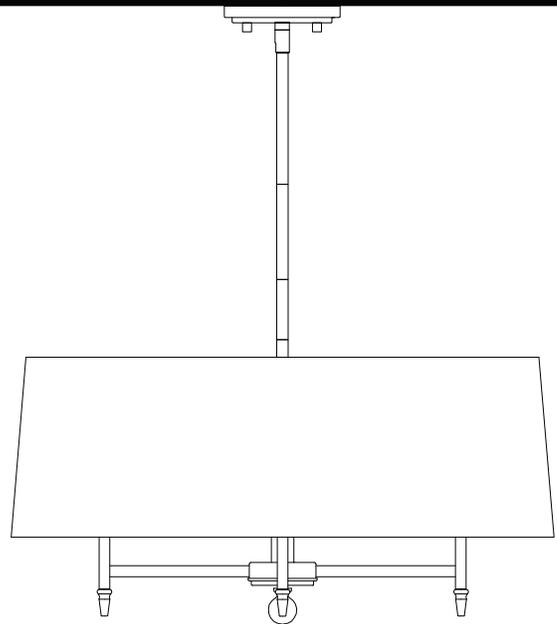


Arlington Chandelier

Crate&Barrel





This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.

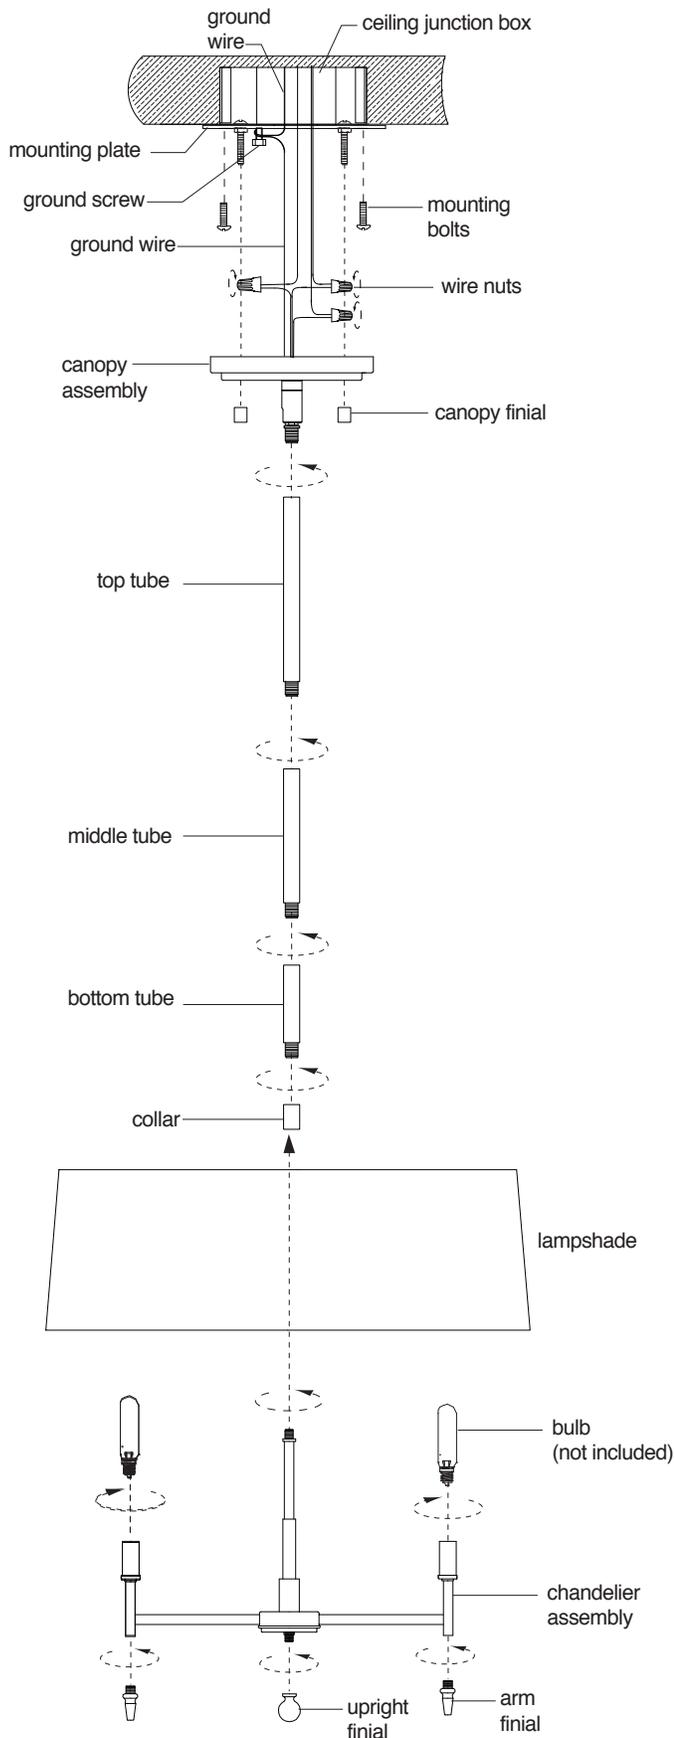


NOTE: We recommend that this fixture be installed by a licensed electrician. If you are unsure about what mounting method you should use, consult a qualified professional or your local hardware store.

CLEANING & CARE

Do not use polishes or cleaners on your lamp.
Dust surfaces with a dry soft cloth.

 phillips head screwdriver (not included)	 2 - canopy finials  3 - wire nuts  4 - arm finials  1 - upright finial  1 - mounting plate (ground screw pre-attached)	 2 - mounting bolts  1 - lampshade  1 - chandelier assembly	 1 - canopy assembly  1 - top tube  1 - middle tube  1 - bottom tube  1 - collar
 flat head screwdriver	 4 - 60 watt max type T bulb (NOT INCLUDED)		
 electrical tape			



- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Attach **top tube**, **middle tube** and **bottom tube** to **canopy assembly** by turning each tube counter clockwise as shown.
- 4) Fit **collar** around **bottom tube** and attach **lampshade** to assembly by securing with **chandelier assembly** as shown
- 5) Align holes in mounting plate with holes in junction box and attach with 2 **mounting bolts**. Secure bolts with a **phillips head screwdriver**.
- 6) Gently pull wiring down from ceiling junction box and allow it to hang
- 7) Carefully inspect the pendant's fixture wires:
 - *Neutral fixture wire* = white wire
 - *Hot fixture wire* = black wire
 - *Ground wire* = silver wire
- 8) Wrap *ground wire* of lamp assembly and *ground wire* of junction box around *ground screw* of mounting plate. Tighten the *ground screw* with a **flat head screwdriver**.
- 9) Attach the *neutral fixture wire* from the pendant to the *neutral junction box wire* (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- 10) Attach the *hot fixture wire* from the pendant to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11) Gently tuck the wire connections neatly into the ceiling junction box.
- 12) Align holes in mounting plate with holes in junction box and attach with 2 **mounting bolts**. Secure bolts with a **phillips head screwdriver**.
- 13) Push **canopy assembly** up over the **mounting plate** until it is flush with the ceiling. Secure canopy bolts with 2 **canopy finials** by turning each finial counter clockwise.
- 14) Attach **upright finial** and 2 **arm finials** by turning each counter clockwise as shown.
- 15) Insert 4 - **bulbs** (not included) into corresponding socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
- 16) Restore power to junction box and test fixture. Installation is now complete.