

Thank you for purchasing the **Felix Chair**. This page lists all the contents included in the box. Please take time to identify the hardware as well as the individual components of this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

Note: 2 people are required to safely assemble this product.


HARDWARE



1 - center bolt 4 - large bolts 5 - spring washers 4 - plastic spacers 4 - caps


Missing hardware? Please call **800.606.6387** for replacements.

TOOLS REQUIRED




allen wrench (included)

COMPONENTS

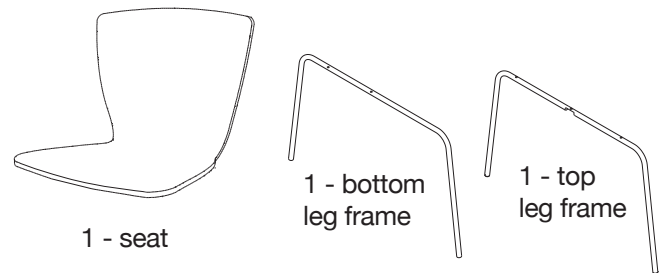

ASSEMBLY

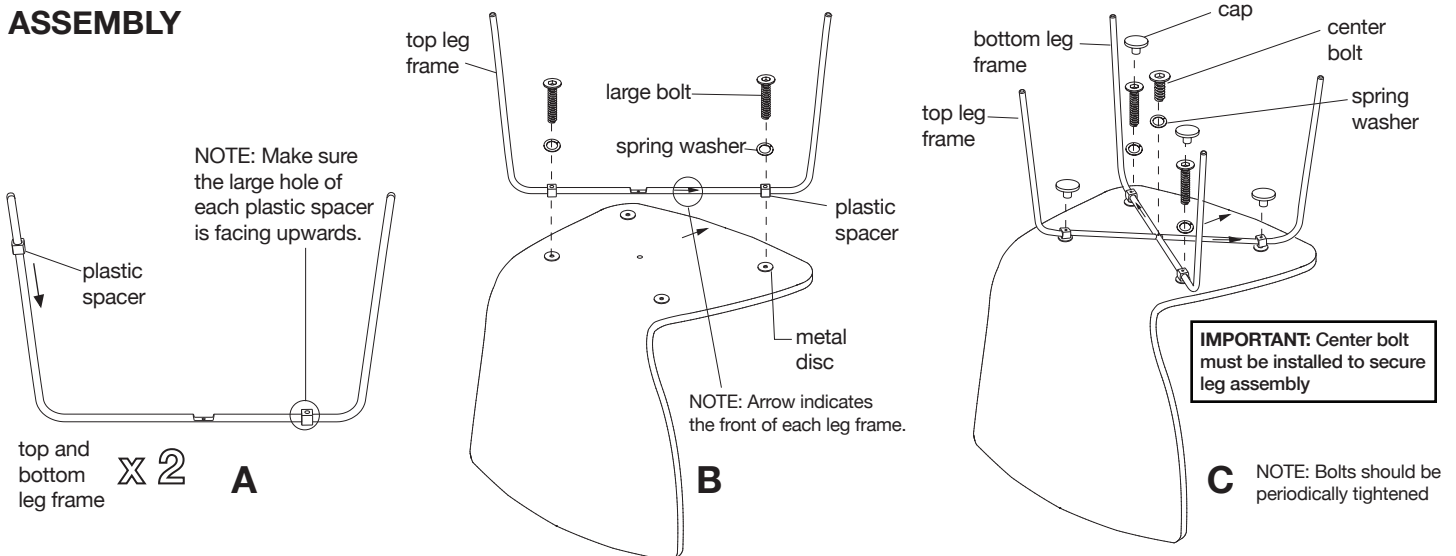

top and bottom leg frame **X 2** **A**

NOTE: Make sure the large hole of each plastic spacer is facing upwards.

NOTE: Arrow indicates the front of each leg frame.

IMPORTANT: Center bolt must be installed to secure leg assembly

C NOTE: Bolts should be periodically tightened

A) Slide 2 **plastic spacers** onto each **leg frame** as shown.

B) Place **seat** upside down onto a clean, padded surface as shown. Align spacers of **top leg frame** with corresponding metal discs of **seat** as shown. Loosely attach **top leg frame** with 2 **large bolts** and 2 **spring washers** as shown.

C) Align spacers of **bottom leg frame** with corresponding discs of **seat** as shown. Loosely attach **bottom leg frame** with 2 **large bolts** and 2 **spring washers**. Loosely secure **top and bottom leg frame** with 1 **center bolt** and 1 **spring washer**. Center bolt must be installed to secure leg assembly. At this point, fully tighten all bolts with the **allen wrench**. Cover large bolts with **caps**. Position unit upright. Assembly is now complete.

CLEANING AND CARE

Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners.